Journal homepage: www.ijorlu.ir

# Simulation Modeling and Analysis of In-Flight Service Operations for Commercial Passenger Flights

M. Savsar\*, Esra E. Aleisa

**Received:** 14 May 2012 ; **Accepted:** 23 August 2012

Abstract Nowadays, in-flight comfort has become an essential characteristic to survive in domestic airline businesses. Air hostesses' quality of service and response time to customer demand plays a vital role in enhancing quality of the flight experience and passenger satisfaction. However, additional requirements on air hostess expose them to fatigue which could eventually result in job dissatisfaction that also will reflect onto the customer. This research studies the detailed tasks of airhostesses that take place from take-off to landing and answers such questions as usefulness of discrete-event simulation in assessing the performance measures of an airline hostess team and in improving them. Different activity scenarios are developed through simulation to provide a better organization of the multi-tasks that the airhostess provide to customers throughout the flight. This study is conducted on an airbus aircraft.

**Keywords** Simulation, In-Flight, Aircraft, Air Hostess, Passenger Flight, Statistical Validation, ANOVA

#### 1 Introduction

Airline companies are striving to improve their in-flight services to maintain sustainable competitive advantage in today's fiercely competing market. The role of the air hostesses plays a vital role in achieving this objective. In this study, we analyze the tasks and work procedures scheduled on typical domestic flights that are required from the air hostesses in an attempt to improve service levels without elevating the work burden on them. We preferred to use discrete-event simulation to model and analyze the air-hostess in-flight activities because of following simulation advantages:

1. Simulation has the ability to identify system parameters such as utilization and flow-time in a system (Mosier [1]; Shafer and Meredith [2]; Savsar [3]; Aleisa [4]; Aleisa and Lin [5]).

E-mail: msavsar@gmail.com (M. Savsar)

#### M. Savsar

Professor, Department of Industrial and Management Systems Engineering, College of Engineering & Petroleum, Kuwait University, P.O. Box 5969 Safat 13060, Kuwait

#### Esra E. Aleisa

Assistant Professor, Department of Industrial and Management Systems Engineering, College of Engineering & Petroleum, Kuwait University, P.O. Box 5969 Safat 13060, Kuwait

<sup>\*</sup> Corresponding Author. (⊠)

[ Downloaded from ijaor.com on 2025-10-23 ]

- 2. Simulation has the ability to reveal potential problems and bottlenecks in a system prior to its implementation (Savsar [6]; Savsar [7]; Aleisa [8]).
- 3. Simulation can be used to evaluate various strategies and resource allocations for the operation of a system (Savsar [9]; Abdulmalek et al. [10]; Aleisa [11]).
- 4. Simulation can be used to compress or expand time, which gives the analysts the convenience of studying a given system for a long-run or under specific short-term scenarios (Pegden, et al. [12]).
- 5. Simulation can be used to incorporate any stochastic behavior and uncertainty by integrating the probability distributions that best describe the activity times (Shafer and Charnes [13]; Savsar [14]; Savsar [15]).
- 6. Simulation models can be used to generate random flow volumes to be used in a system under study to evaluate alternative scenarios (Savsar [16]; Savsar [17]).

The aim of the simulation study in analyzing air hostess tasks in this study is to achieve the best combination of the following objectives:

- 1. Reduce response time to passenger requests
- 2. Reduces bottlenecks in airplane corridors that often take place between airhostess serving passengers and the passengers themselves.
- 3. Reduce crew travel distance and time
- 4. Utilize the resources (hostesses) efficiently without overworking them.

Discrete-event simulation was applied requisitely in the areas of aircraft industry and airline business. Increased demand on air travel forced pioneers to investigate air-taxi services. The operations of such services were evaluated using discrete event simulation (Boyd, al. [18]; Consiglio, et al. [19]). Such aircrafts were characterized with narrow bodies. Rijsenbrij and Ottjes [20] have used discrete-event simulation to try different concepts of baggage transport to and from such narrow body aircrafts. Moreover, newly established security procedures have affected the business as usual tasks have grown in airport terminals. De Barros [21] used discrete-event simulation to evaluate the impact of newly established security measurements on the planning and operation of airport passenger terminals.

Manivannan and Zeimer [22] applied discrete-event simulation techniques to evaluate and improve the plane offloading operations in a central air cargo hub. In addition, discrete-event simulation was applied to improve fleet maintenance schedules with respect to performance measures such as aircraft cycle time and mechanics labor utilization as studied by Bazargan and McGrath [23] and to improve maintenance operations of a fleet of fighter aircrafts in crises situations as studied by Mattila, et al. [24]. It was also applied to test different scenarios to examine different aircraft policies in the battle field by Mishra, et al. [25]. To the best knowledge of the authors, there has not been any studies related to aircraft hostess activity analysis and hostess utilizations improvements.

This paper presents a simulation model that is used to analyze aircraft hostess activities during a flight with the aim to improve passenger service without increasing workload burden on air hostesses. Several improvement scenarios were suggested and simulated. The simulation model is applied to two passenger classes: first/business class and economy class. After validation of the as-is system, several improvements scenarios including automation and other procedures are modeled and compared with the as-is model. Finally the best improvements are chosen through the application of ANOVA.

# Downloaded from ijaor.com on 2025-10-23 ]

#### 2 Aircraft and Air Hostess Duties

This research is conducted on the Airbus 300 (A300) as it is the most commonly used aircraft type in the Middle East. A300 accommodates 232 passengers, its length is 54.10 m and height is 16.54 m. A300 consists of four zones:

Zone A (F/C) rows from 1-3: 18 seats
 Zone B(J/C) rows from 6-8: 18 seats
 Zone C (E/Y) rows from 9-20: 96 seats
 Zone D(E/Y) rows from 21-33: 100 seats

It also includes six lavatories including one for handicapped.

Before passengers enter the airplane, many safety procedures and scheduling take place. First, a one-hour briefing session takes place in the in-flight services department. In this session each crew member is assigned to specific tasks. Furthermore, the crew is tested orally on safety questions. A crew member failing to answer any of these questions is offloaded from the program, and sent back to retake a safety exam.

The crew then enters the airplane before the passengers arrive to perform routine checks on the inside of the airplane according to a checklist that they have. If the airplane is ready, the crew will give clearance to the chief, which will then report clearance to the aircraft captain in order to call for the passenger's boarding. The checklists are divided according to different classes, and the phase in which the services should be offered. Longer flights have different checklists with different services. The duties of an air hostess will differ according to class. The duties of an air hostess for the economy class are provided in table 1.

### 3 Data Collection

The data collection was conducted during actual flights that took place on airbus aircraft that traveled to various destinations from Kuwait. The data collection included the time required for scheduled in-flight air hostess tasks, as shown in table 2 in minutes. In addition, the data collection included the inter-arrival times for passengers calling air hostesses for questions, beverages, extra pillows and blankets, screen, chair problems and other types of assistance, and the time for an air hostess to serve a passenger. Moreover, inter-arrival times to lavatories and the times these lavortories were occupied by the passengers were also collected. Also, the study considered times that the aisles were blocked by the food cart and impeded passenger service.

[Downloaded from ijaor.com on 2025-10-23]

Table 1 Detailed air hostess duties in the aircraft

	Complete checklist  Standard galley preparation  Place juice, beverages, water on ice  Check cleanliness of cabin, seat pockets,	In-flight seat belt OF	Place baby cots, offer blankets, pillows & check toilets immediately after take-off. Offer children give-aways. Proceed with service as per procedure. Inspect cleanliness of toilets after each use and				
	hangers, headrest covers, open bins, outlets & window shades.	n-flig	when needed.				
pun	Check pillows, blankets, baby cots, spares etc.		Prepare& distribute documentation & restow.				
On Ground	Check cleanliness/ serviceability of toilets, place cosmetics & spray.	Ħ	Inform Purser of any U/S equipment.				
On	Check J/C headsets, J/C &E/Y & complete forms.	Decent	Clear up galleys, uplift via Purser if needed.				
	Check toolkit, menu cards & complete forms.		Clear up cabin, restow pillows, blankets, etc				
	Prepare reading material & headsets. Prepare drinks trays with glasses.		Distribute jackets. Collect& restow toilet cosmetics.				
	Conduct random check of seats serviceability.		Collect& restow menu cards cosmetics.				
	Liaise with deck crew regarding their meals &	On	Seal dry stores, beverage trolleys, tool kit				
	offer beverages.	ign	container &secure galleys.				
Boarding	Welcoming, checking boarding cards, addressing pax by name, assisting in seating, coats& hand baggage.	Seat Belt Sign On	Complete zone checks according to emergency zone.				
	Distribute newspapers on lined trays.  Prepare & offer welcome drinks, collect glasses.		Give zone clearance to purser.  Take emergency stations for landing after passing clearance.				
	Prepare hot & cold face towels.		Distribute coats/belongings. Change mode selector upon announcement &				
	Distribute face towels & collect.		cross check.				
	Close door when instructed.		Give clearance to purser.				
			1				
ing	Change mode selector upon announcement, cross check.		Obtain clearance to open door.				
oarding		s u					
r Boarding	cross check.  Offer dates/Arabic delights.  Offer Arabic coffee & collect cups.	anding	Obtain clearance to open door.  Assist passengers during disembarkation& farewell.  Collect headsets.				
After Boarding	cross check.  Offer dates/Arabic delights.  Offer Arabic coffee & collect cups.  Distribute headsets.	er Landing	Obtain clearance to open door.  Assist passengers during disembarkation& farewell.  Collect headsets.  Check cabin for left behind pax belonging.				
	cross check.  Offer dates/Arabic delights.  Offer Arabic coffee & collect cups.  Distribute headsets.  Safety demonstration( special demo for blind, deaf)	After Landing	Obtain clearance to open door.  Assist passengers during disembarkation& farewell.  Collect headsets.  Check cabin for left behind pax belonging.  Clear up cabin from CRDs, newspapers,				
	cross check.  Offer dates/Arabic delights.  Offer Arabic coffee & collect cups.  Distribute headsets.  Safety demonstration( special demo for blind, deaf)  Clear up cabin		Obtain clearance to open door.  Assist passengers during disembarkation& farewell.  Collect headsets.  Check cabin for left behind pax belonging.  Clear up cabin from CRDs, newspapers,  Seal give aways containers & complete forms.				
	cross check.  Offer dates/Arabic delights.  Offer Arabic coffee & collect cups.  Distribute headsets.  Safety demonstration( special demo for blind, deaf)		Obtain clearance to open door.  Assist passengers during disembarkation& farewell.  Collect headsets.  Check cabin for left behind pax belonging.  Clear up cabin from CRDs, newspapers,				
	cross check.  Offer dates/Arabic delights.  Offer Arabic coffee & collect cups.  Distribute headsets.  Safety demonstration( special demo for blind, deaf)  Clear up cabin		Obtain clearance to open door.  Assist passengers during disembarkation& farewell.  Collect headsets.  Check cabin for left behind pax belonging.  Clear up cabin from CRDs, newspapers,  Seal give aways containers & complete forms.  Collect headsets, complete form& seal container.  Seal newspaper bag.				
	cross check.  Offer dates/Arabic delights.  Offer Arabic coffee & collect cups.  Distribute headsets.  Safety demonstration( special demo for blind, deaf)  Clear up cabin  Clear up& secure galleys.		Obtain clearance to open door.  Assist passengers during disembarkation& farewell.  Collect headsets.  Check cabin for left behind pax belonging.  Clear up cabin from CRDs, newspapers,  Seal give aways containers & complete forms.  Collect headsets, complete form& seal container.				

Class	Wet towels	headsets	Immigration cards	Food cart	Beverage trolley	Tea	Other Beverages
First and business class	7.3	3.67	5.3	24.3	28.67	10.3	9.53

7

6.65

32.3

35

15.6

14.4

7.7

Table 2 Average air hostess in-flight task times in minutes

# 4 Model Assumptions and Data Fitting

Economy class

The simulation study is assumed to take place during normal flight conditions. No emergency situations took place including the need for oxygen mask or CPR. Due to the random nature of data collected for passenger requesting air hostess assistance and using lavatories, the data were fitted into distributions using the Arena Input Analyzer statistical add-in (Kelton, et. al. 2002) The data fitting is provided in table 3 and the graph of inter-arrival of service calls by economy class passengers is given in figure 1.

Table 3 Fitting random data into statistical distributions

Task	Distribution (min)	Squared Error
Hostess call inter-arrival (F/J)	TRIA(0.5, 5, 22.5)	0.012512
Hostess call inter-arrival (Economy)	-0.5+EXPO(4.51)	0.006046
Hostess response time to calls (F/J)	-0.5+5*BETA(7.91, 11.6)	0.001523
Hostess response time to calls (Econ)	-0.5+7 *BETA(1.15, 1.83)	0.003209
Time in Lavatory (F/J)	NORM(3.47, 0.882)	0.001538
Time in Lavatory (Econ)	NORM(4.56, 2.01)	0.011896




Fig. 1 Data fitting of inter-arrival service call times for air hostesses from passengers of the economy class

#### **5 Simulation Models**

Two simulation models were created to mimic the activities conducted by air hostesses within the aircraft. The first model was for the first and business classes (F/J) and the second model was for the economy class. The entities of the simulation system are passenger orders and

tasks scheduled to the air hostesses. On the other hand the system resources are the air hostesses themselves and the aircraft lavatories.

For Airbus 300, there are three air hostesses for (F/J) classes and six for the economy class. As discussed earlier, the simulation model was developed and carried out based on the collected data for normal flight conditions with no emergencies. Handicapped were given priority of service within each class. The simulation model was created using Arena Rockwell Software (Kelton et. al. [26]). A snap shot of the simulation model for the F/J class is shown in figure 2. The economy class simulation has similar logic but is not shown here to avoid repetition. The output of the model is given in table 4.

**Table 4** Simulation output from simulating the as-is system of in-flight airhostess activities (average values)

Parameter	F/J class	<b>Economy Class</b>
Number of tasks served	35	71
Waiting time (min)	9.21	8.60
Number of order tasks in hostess queue	1	2
Hostess utilization	0.5110	0.6685

Table 4 shows that during a 4-hour flight on airbus 300, an airhostess was busy conducting average of 35 requests for F/J class while 71 for economy class. It can be seen that the hostesses were able to satisfy all requests except for 1 in the first class and 2 in economy. This was probably due to placing orders during times when services were not provided, such as take-off and landing. Also, the average waiting time for service was 9.21 and 8.6 for F/J and economy classes respectively because many customers would place requests during times when hostesses were conducting longer scheduled tasks such as serving lunch or dinner to all aircraft passengers. The indicated utilizations exclude times when air hostesses are forced to remain seated according to aviation regulations during take-off and landing times.

#### 6 Simulation Model Validation

Statistical analyses were conducted to ensure that the model was a valid representation of reality. A t-test between the parameters of the *real system* and the *simulation model* are provided in this section. The simulation was replicated 10 times and the results are shown in table 5, where "R" denotes data collected from the real system and "A" denotes data collected from the simulated system through the Arena package. To accomplish validation, we need to compare two populations (the real and simulated), by drawing random samples from each population. Depending whether or not the sample sizes and variances are equal, different formulas need to be used.

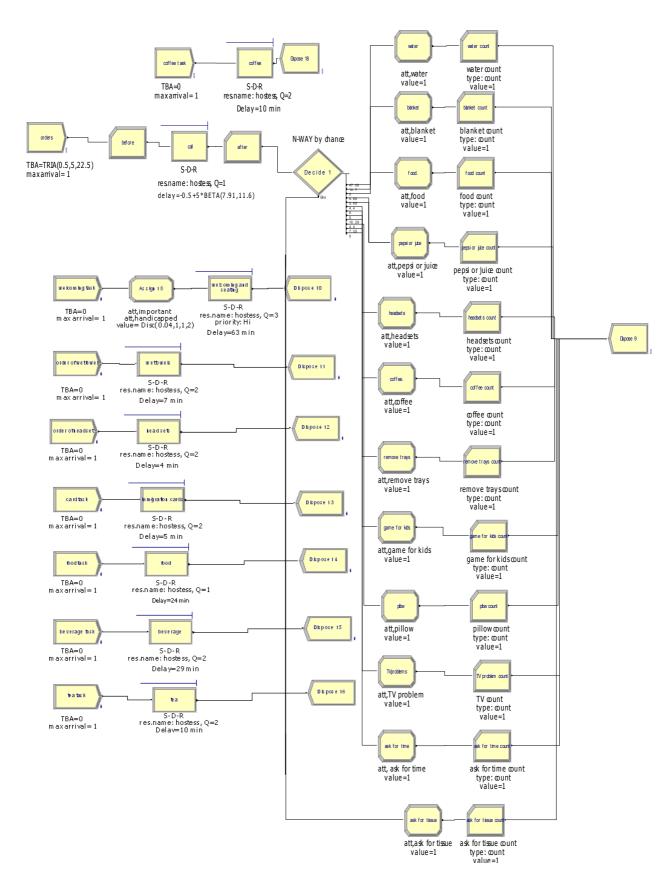


Fig. 2 ARENA-Based discrete-event simulation model for airhostess activities for the (F/J) class during a flight

[2]

Let  $m_i$  indicate the population mean for the parameter of interest;  $\overline{X}_i$ ,  $s_i$  and  $n_i$  indicate mean, standard deviation and sample size of sample i respectively; Sample values form the real system (i=1) for number of answered calls by air hostess for the F/J class:

$$\overline{X}_1 = 25.83 \text{ calls}; \quad s_1 = 3.25 \text{ calls}; \quad n_1 = 6$$

Sample values form the *simulated system* (i=2) for number of answered calls by air hostess for F/J class:

$$\overline{X}_2 = 27 \text{ calls}; \quad s_2 = 1.9 \text{ calls}; \quad n_2 = 6$$

To conduct a statistically sound validation, the equality of two population variances needs to be verified, prior to checking the equality of means. At a 95 % confidence level we *fail to reject* that the two variances are unequal, therefore, the variance for the real and simulated system are pooled. The pooled standard deviation  $S_p=2.6615$ .

The *t*-distribution statistic will result in:

$$t_0 = \frac{\bar{X}_1 - \bar{X}_2}{sp\sqrt{1/n_1 + 1/n_2}} = -0.76 \tag{1}$$

The *t-test* for 95% confidence intervals for  $m_1 - m_2$  is calculated as follows:

$$m_1 - m_2 = \bar{X}_1 - \bar{X}_2 \pm t_{\alpha/2, n_1 + n_2 - 2} S_p \sqrt{\left(\frac{1}{n_1} + \frac{1}{n_2}\right)}$$

Substituting values in the above equation yields:

$$-4.58 \le m_1 - m_2 \le 2.26$$

Also, the *p-value* =0.465 is larger than the significance level 0.05 which means that we fail to reject the hypothesis that means of the two populations are equal. In other words, mean values obtained from simulation is equal to the mean values obtained from real life, which verifies that the simulated model is a valid representation of reality.

The statistical validation procedure indicated above was repeated for all parameters provided in table 5 for all classes First (F), Business (J) and Economy. The results are shown in table 6. Again, the statistical analysis at a 95% confidence level indicates that the simulated system is a valid representation of reality.

Downloaded from ijaor.com on 2025-10-23

**Table 5** Comparisons of data from the real and simulated system over 10 replications for calls received by air hostess in the F/J class

Run #	Bla	nket	Ga	me	Неа	dsets	Bev	erage	Pil	low		TV	Wa	ater	Calls wa		No. of waiting queue	
	R	A	R	A	R	A	R	A	R	A	R	A	R	A	R	A	R	A
1	3	5	1	0	0	2	2	3	0	2	2	4	14	9	5	8	0	1
2	5	2	4	3	1	0	7	5	2	1	3	5	12	15	8	8	0	1
3	3	6	2	1	1	3	6	3	1	0	5	2	8	10	11	8	1	1
4	2	4	1	4	2	1	3	4	1	2	5	2	15	13	10	9	2	1
5	6	1	3	2	0	1	2	6	3	2	1	0	11	15	9	7	1	1
6	3	2	0	4	2	1	3	3	1	1	0	2	5	15	6	10	1	1
7	1	6	0	0	3	1	4	5	1	2	0	2	6	11	12	11	0	1
8	1	3	1	5	1	2	4	5	1	2	2	1	10	5	10	11	1	1
9	4	6	2	2	1	2	3	2	2	1	4	5	13	7	8	7	2	1
10	4	5	11	2	3	0	4	6	2	1	4	0	10	15	8	12	2	1
Mean	3.2	4.0	1.5	2.3	1.4	1.3	3.8	4.2	1.40	1.40	2.6	2.3	10.4	11.5	8.7	9.1	N/	'A
St.Dev.	1.6	1.8	1.27	1.7	1.1	0.95	1.6	1.4	0.84	0.70	1.9	1.83	3.69	3.31	2.16	1.79		
SE-Mean	0.5	0.6	0.4	0.54	0.3	0.3	0.5	0.44	0.27	0.22	0.58	0.6	1.0	1.2	0.57	0.68		
CI on Diff.	-0.85	, 2.45	-0.62	, 2.22	-1.05	, 0.85	-1.02	., 1.82	-0.73	, 0.73	-2.05	, 1.45	-2.2	, 4.4	-1.47	, 2.27	N/	'A
Key:			R: E	ata fr	om th	e real	syste	m	A: ]	Data f	rom tl	he sim	ulateo	l syste	em of the	e Arena	model	

**Table 6** Statistical validation between the real and simulated systems using the sample t-test ( $\alpha$ =0.05) over 10 replications

Parameter	$X_1$ (real)	$X_2$ (simulated)	$\mu_{1-}\mu_2$	P-value
Blankets	4.0	3.2	(-0.85, 2.45)	0.32
Games	2.3	1.5	(-0.62, 2.22)	0.25
Headsets	1.3	1.4	(-1.05, 0.85)	0.83
Beverage	4.2	3.8	(-1.02, 1.82)	0.59
Pillow	1.4	1.4	(-0.73, 0.73)	1
TV	2.3	2.6	(-2.05, 1.45)	.72
Water	11.5	10.4	(-2.2, 4.4)	.49
Wait in Q	9.1	8.7	(-1.47, 2.27)	0.66

# 7 Simulation Models of the Improvement Scenarios

By analyzing the production runs of the in-flight simulation model, we realized that several improvements could take place to improve the passenger service without elevated work burden on the air hostess. These improvements are based on possible automation of some in-flight services that are listed below. These improvements were formulated as-is simulation model scenarios to be compared with the as-is system. Six scenarios were simulated:

**Scenario 1:** Providing the overhead passenger belonging bins with a hydraulic closing mechanism that locks the bins automatically during take-off and landing.

**Scenario 2:** Providing a system for the passengers to choose their meal from the menu using the screen on the seat in front of them.

**Scenario 3:** Allowing passengers to place requests for beverages from the touch screen. This allows air hostess to satisfy multiple orders at the same time.

Downloaded from ijaor.com on 2025-10-23 ]

**Scenario 4:** Allowing passengers to preview from the display screens whether or not the aisles are blocked by the food cart. This attempts to facilitate both hostess and passenger movement during the flight.

**Scenario 5:** Since the request for water is the most frequent task that an air hostess will answer, this scenario examines the case when bottled water is placed at every passenger's seat before passengers enters the airplane.

**Scenario 6:** Using an automatic inflating and deflating pillow that is attached to the passenger seat. This reduces the call for pillows which is also requested in a high rate.

Scenario 7: A combined scenario of all the previous 6 scenarios.

# 8 Output Analysis of Improvement Scenarios

A simulation model was developed for each of the seven scenarios discussed earlier in section 7. Each simulation model was run with specified parameters and replicated 10 times. The results for the F/J class are provided in table 7, while those for the economy class are provided in table 8. As shown in table, combining the six scenarios have tremendously affected system performance. For instance, the average response time of passenger calls has reduced from 9.21 to 0.1 minutes for the F/J class and from 8.6 minutes to 0.1 minutes for the economy class. In addition, the air hostess utilization was reduced by 12% for the F/J class and around 14% for the economy class. The number of calls for hostess service has been reduced due to the initial supply of inflatable pillows and bottled water on the passenger seats.

Table 7 Simulation model output of the as-is model and the seven improvement scenarios for the F/J class

F/J Class	As-is- Model	1 <sup>st</sup> Scenario	2 <sup>nd</sup> Scenario	3 <sup>rd</sup> Scenario	4 <sup>th</sup> Scenario	5 <sup>th</sup> Scenario	6 <sup>th</sup> Scenario	7 <sup>th</sup> Scenario
Number of calls requested	27	27	27	27	27	25	24	25
Number of calls satisfied	27	27	27	27	27	25	23	25
Waiting time in calls queue (min)	9.21	6.7	8.95	8.69	6.3	9.8	9	0.0909
Number of Orders waiting in calls queue	1.008	0.73	0.97	0.94	.067	0.99	0.84	0.5519
Hostess Utilization	0.5110	0.4801	0.4890	0.4910	0.4703	0.5040	0.5010	0.4507

# 9 Analysis of Variance


We applied the analysis of variance (ANOVA) to statistically identify the most influential factors in improving the performance measures of the system. Each of the previously discussed scenarios is modeled as an ANOVA factor. ANOVA analysis was conducted for both F/J and economy classes and with respect to all performance measures. ANOVA was conducted using


Minitab package. Minitab results for the F/J class with respect to order waiting time and air hostess utilization are shown in Fig. 3.

Table 8 The simulation model output of the as-is model and the seven improvement scenarios for the economy class

Faanamy Class	As-is-	1 <sup>st</sup>	2 <sup>nd</sup>	3 <sup>rd</sup>	4 <sup>th</sup>	5 <sup>th</sup>	6 <sup>th</sup>	Combined
<b>Economy Class</b>	Model	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario	Scenario
Number of calls requested	63	63	63	62	63	41	64	43
Number of calls satisfied	63	63	63	62	63	40	64	43
Waiting time in calls queue (min)	8.6	6.462	8.59	8.02	5.83	8.09	8.52	0.0982
Number of Orders waiting in calls queue	2.15	1.62	2.148	2.08	1.46	1.31	2.20	1.0058
Hostess Utilization	0.66	0.64	0.62	0.63	0.62	0.63	0.66	0.5689

# One-way ANOVA: wait time versus fct



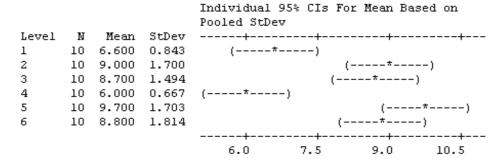


Pooled StDev = 1.441

**Fig. 3** Minitab ANOVA output for comparing scenarios with respect to calls waiting time in queue for the F/J class (levels are scenarios)

As shown in Figure 3 the *p-value* is very small, which indicates that there is significant difference between the effects of each factor (scenarios in this case) with respect to waiting time. In the same figure, the multiple comparison diagrams show that the first and fourth factors have the most influence since they have the least values for waiting time. However, since very strong interaction occurs between the two factors, they are both candidates for being the best factors or scenarios.


The Tukey's test shown in Figure 4 gives further analysis related to the interactions. Tukey's test is an efficient statistical method to conduct pairwise comparisons among the means of all factors in the ANOVA design. Tukey's test proves that there is a strong

interaction between the scenarios one and four. However, it shows that the fourth scenario has a slightly stronger effect.

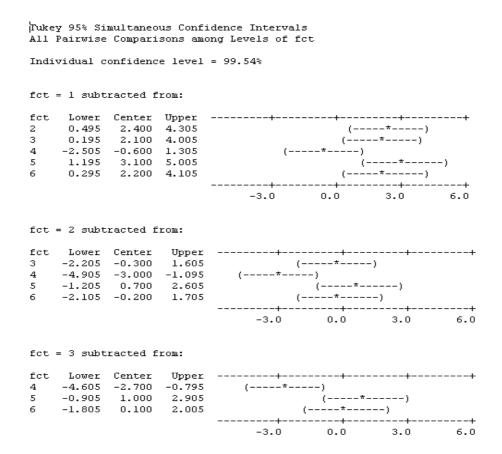

**Fig. 4** Tukey's pairwise comparison test of the effect of simulation scenarios with respect to waiting time in the F/J class

Similar analysis is conducted with respect to the air hostess utilization. The results are provided in Figure 5. Again, the *p-value* equals to zero, which indicates a significant effect between the factors. The analysis implies that the first scenario is the most affecting factor in this case. The preceding analyses were repeated for the air hostesses of the economy class but were omitted here to avoid repetition.

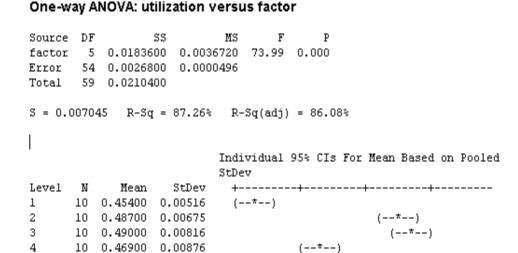

Pooled StDev = 0.00704

0.50500

0.49900

0.00527

0.00738

10

Fig. 5 Minitab ANOVA output for comparing scenarios with respect to hostess utilization for the F/J class

0.465

0.480

0.450

#### 10 Conclusions

5

In this research we have conducted a discrete event simulation study and subsequent statistical analysis for the activities of air hostesses during aircraft flights. The aim was to improve passenger service without increasing workload burden on air hostesses. Several improvement scenarios were suggested and simulated. The simulation models were statistically validated and compared to real data collected during actual flights. The outputs of the improved scenarios were statistically verified and modeled using ANOVA. The study has resulted in improved service and less fatigue on air hostesses in first, business and economy classes. The authors believe that these results could be extremely useful for airliners that want to improve their in-flight service operations.

#### References

- 1. Mosier, C. T. (1989). Experiment investigating the application of clustering procedures and similarity coefficients to the GT machine cell formation problem. International Journal of Production Research, 27(10), 1811-1835.
- 2. Shafer, S. M., Meredith, J. R., (1990). A Comparison of Selected Manufacturing Cell-Formation Techniques. International Journal of Production Research, 28(4), 661-673.
- 3. Savsar, M. (1992). Maintenance Crew Size Determination by Computer Simulation. Journal of King Saud University Engineering Sciences, Special issue on Maintenance, 4, 45-66.
- 4. Aleisa, E., (2005). Multilevel Integration of Simulation and Facilities Planning for Large-Scale Systems. PhD. Thesis, Department of Industrial Engineering, The State University of New York at Buffalo, Buffalo, NY.

[ Downloaded from ijaor.com on 2025-10-23 ]

- Aleisa, E., Lin, L., (2005). For effective facilities planning: layout optimization then simulation, or vice versa?. Proceedings of the 37th conference on Winter simulationWinter Simulation Conference, Orlando, Florida, 1381-1385.
- 6. Savsar, M., (1997a). Simulation Analysis of a Pull-Push System for an Electronic Assembly Line. International Journal of Production Economics, 51, 205-214.
- 7. Savsar, M., Youssef, A. S., (2004). An Integrated Simulation-Neural Network Meta Model Application in Designing Production Flow Lines. WSEAS Transactions on Electronic, 1, 366-371.
- 8. Aleisa, E., (2008a). Developing Efficient Testing and Unloading Procedures for a Local Sewage Holding Pit. International Journal of Computer, Information, and Systems Science, and Engineering, 2(3), 138-145.
- 9. Savsar, M., (1999). Simulation of Dynamic Resource Allocation Policies Transfer Lines with Serial Duplicate Stations. Simulation, 72(6), 391-400.
- 10. Abdulmalek, F., Savsar, M., Aldaihani, M., (2004). Simulation of Tool Change Policies in a Flexible Manufacturing Cell. WSEAS Transactions on Systems, 7(3), 2546-2552.
- 11. Aleisa, E., (2008b). An Overview Of Multilevel And Hierarchical Methods For Discrete-Event Simulation Of Complex Systems. In Industrial Simulation Conference (ISC08), J. Colloc, C. Petit and C. Dussart. Lyon, France, 249-255.
- 12. Pegden, C. D., Shannon, R. E., Sadowski, R. P., (1995). Introduction to simulation using SIMAN. McGraw-Hill, New York.
- 13. Shafer, S. M., Charnes, J. M., (1997). Offsetting lower routeing flexibility in cellular manufacturing due to machine dedication. International Journal of Production Research, 35(2), 551-567.
- 14. Savsar, M., (1997b). Simulation Analysis of Maintenance Policies in Just-In-Time Production Systems. International Journal of Operations & Production Management, 17(3), 256-266.
- 15. Savsar, M., (2006). Buffer Allocation in Serial Production Lines with Preventive and Corrective Maintenance Operations. Kuwait Journal of Science and Engineering, 33(2), 1-14.
- 16. Savsar, M., (1990). Flexible Facility Layout by Simulation. Computers and Industrial Engineering, 20(1), 155-165.
- 17. Savsar, M., (2005). Effects of Random Material Flow Volumes on Layout Flexibility. International Journal of Industrial Engineering, 12(3), 234-243.
- 18. Boyd, J. A., Bass, E. J., Patek, S. D., Lee, D. W., (2006). Investigation of future air taxi services using discrete-event simulation. 2006 IEE Systems and Information Engineering Design Symposium, 25-30.
- 19. Consiglio, M. C., Williams, D. M., Murdoch, J. L., Adams, C. A., (2008). Concept validation experiment for small aircraft transportation system higher-volume operations. Journal of Aircraft, 45(2), 359-365.
- 20. Rijsenbrij, J. C., Ottjes, J. A., (2007). New developments in airport baggage handling systems. Transportation Planning and Technology, 30(4), 417-430.
- 21. De Barros, A. G., Tomber, D. D., (2007). Quantitative analysis of passenger and baggage security screening at airports. Journal of Advanced Transportation, 41(2), 171-193.
- 22. Manivannan, S., Zeimer, M., (1996). Modeling and analysis of aircraft offloading operations. 1996 Winter Simulation Conference Proceedings, 1359-1366.
- 23. Bazargan, M., McGrath, R. N., (2003). Discrete event simulation to improve aircraft availability and maintainability. Annual Reliability and Maintainability Symposium Proceedings, 63-67.
- 24. Mattila, V., Virtanen, K., Raivio, T., (2003). A simulation model for aircraft maintenance in an uncertain operational environment. ESM 2003: 17th European Simulation Multiconference, 456-461.
- 25. Mishra, S., Batta, R., Szczerba, R. J., (2004). A rule based approach for aircraft dispatching to emerging targets. Military Operations Research, 9(3), 17-30.
- 26. Kelton, W. D., Sadowski, R. P., Sadowski, D. A., (2002), Simulation with ARENA, Second Edition, McGraw Hill, New York, USA.